



MCO-230AICUVL-PA

cellIQ™

CO₂ Incubator

8.1 cu.ft. | 230 L



Enhance the production of your cell culture experiments with Panasonic Healthcare's large capacity CO₂ incubator. Ideal for high throughput culturing or protocols that may require the use of experimental apparatus.

Precise and Repeatable Environment

The patented Direct Heat and Air Jacket system works with the IR2 sensor to provide precise temperature and CO₂ levels, respectively. InCu-saFe® and SafeCell™ UV function together to prevent contamination.

Time-Saving Decontamination

Optional Panasonic Healthcare high speed decontamination system uses hydrogen peroxide [H₂O₂] vapor to safely clean the chamber in less than three hours, while providing 100% kill rate with at least a six log reduction of major contaminants.


Improved Use and Maintenance

A color LCD touchscreen panel delivers full control, even with gloved hands, while a standard USB port makes log data transfer to PC convenient. Integrated shelf channels make cleaning easy within the large interior and allow more capacity for cell culture containers and apparatus.



Germicidal Interior

InCu-saFe copper enriched, stainless steel alloy offers germicidal properties of elemental copper without corrosion or discoloration.

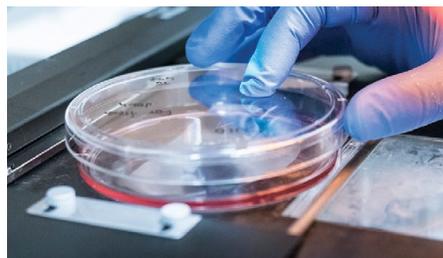

Contamination Control

Isolated UV lamp decontaminates circulated air and the humidity water reservoir without harming the cultured cells.



Intuitive Control

Control panel interface allows for easy programming of temperature, CO₂ and other internal conditions of your incubator.




Model MCO-230AICUVL-PA

Direct Heat and Air Jacket System

Accurate temperature levels are regulated by the Direct Heat and Air Jacket system which functions under microprocessor control.


Rapid CO₂ Density Recovery

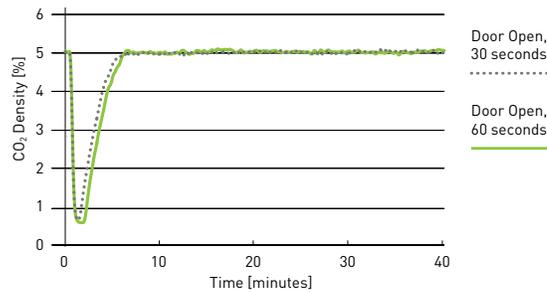

Proprietary IR2 sensor achieves ultrafast CO₂ recovery without overshoot, even following multiple door openings.

Dimensions

Unit : inch | mm

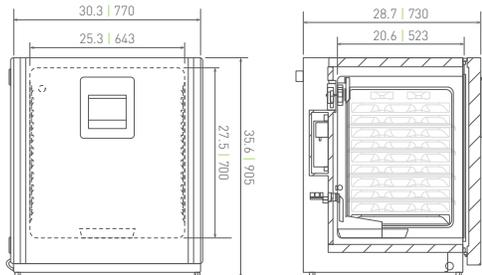

Model Number	MCO-230AICUVL-PA		With Optional H ₂ O ₂ Decontamination
External Dimensions (W × D × H) ¹⁾	inches mm	30.3 × 28.7 × 35.6 770 × 730 × 905	
Internal Dimensions (W × D × H)	inches mm	25.3 × 20.6 × 27.6 643 × 523 × 700	
Volume	cu.ft. liters	8.1 230	
Net Weight	lbs. kg	198 90	
Performance			
Warranty ²⁾		3 Years parts and labor, 5 years CO ₂ sensor	
Temperature Control Range and Fluctuation ³⁾	°C	+5 above ambient to +50, ± 0.1	
Temperature Uniformity ³⁾	°C	± 0.25	
CO ₂ Control Range and Fluctuation ³⁾	%	0 to 20, ± 0.15	
Humidity Level & Fluctuation	% RH	95 at 37°C, ± 5	
Control			
Controller		Microprocessor	
Temperature Sensor		Thermistor	
Display		Color LCD touchscreen – readable in 0.1 increments	
Sensor	CO ₂	Dual filter IR	
Construction			
Exterior Material		Painted steel (rear cover coated steel)	
Interior Material		Stainless steel copper enriched alloy	
Outer Door	qty	1	
Field Reversible Door		Included	
Inner Door	qty	1; Sealing tempered glass with positive latch	
Humidity Pan	qty	1; Stainless steel	
Shelves	qty	4; Stainless steel copper enriched alloy	
Shelf Dimension (W × D × H)	inches mm	24.4 × 17.7 × 0.5 620 × 450 × 12	
Max. Load per Shelf	lbs kg	15 7	
Max. Total Load	lbs kg	60 28	
Max. Shelf Capacity	qty	10	
Access Port / Position	qty	1; Rear upper left	
Access Port Diameter	inches mm	1.2 30; with silicone (non-VOC) stopper	
Leveling Feet	qty	4	
Decontamination Control			
InCu-saFe Chamber, Plenum, Shelves	passive	Included (stainless steel copper enriched alloy)	
SafeCell UV Light System	passive/active	Included	
Hydrogen Peroxide (H ₂ O ₂) Vapor	active	Optional	Included
Alarms (V=Visual Alarm, Buzzer Alarm, R=Remote Alarm)			
Power Failure		R	
Temperature Deviation	high	V-B-R	
Gas Deviation	CO ₂	V-B-R	
Supply Empty	CO ₂	V-B-R	
Door Open		V-B	
Electrical and Noise Level			
Power Supply		115V, 1Ø, 60Hz, NEMA 5-15P requires NEMA 5-15R receptacle	
Noise Level ⁴⁾	dB(A)	25	
Options			
Hydrogen Peroxide (H ₂ O ₂) Vapor Board		MCO-170HB-PA ⁵⁾	Included
Outer Door – Password Access Electronic Lock		MCO-170EL-PW ⁵⁾	Included
H ₂ O ₂ Vapor Generator		MCO-HP-PW ⁵⁾	
H ₂ O ₂ Reagent	package of 6	MCO-H202-PV	
CO ₂ Gas Pressure Regulator	psi	0 – 15; MCO-100L	
Automatic CO ₂ Cylinder Changeover System		MCO-216C-PW	
InCu-saFe Shelf		MCO-230ST-PW	
InCu-saFe Shelf–Reinforced		MCO-230RT-PW	
Double Stacking Bracket ⁶⁾		MCO-230PS-PW	
Roller Base		MCO-230RB-PW	
4-20mA Analog Output		MCO-420MA-PW	
Optional Communication System			
Wireless, Cloud-based, Automatic Data Management		LabAlert® Monitoring System	

1) Exterior dimensions of main cabinet only, excluding handle and other external projections

2) Current warranty offered at time of printing and may be subject to change

3) Ambient temperature 23°C, setting 37°C, CO₂ 5%, no load

4) Nominal value, background noise 20 dB(A)

5) MCO-230AIC series requires MCO-170HB-PA, MCO-170EL-PW and MCO-HP-PW for H₂O₂ Decontamination

6) If stacking two incubators, make sure the double stacking dedicated secure hardware and spacer are used

Note: Additional options available. Contact Panasonic Healthcare

